

Always maintain inflation pressure at the level recommended by the vehicle's manufacturer as shown on the vehicle placard, vehicle certification label or in the vehicle owner's manual:

Underinflation is the leading cause of tire failure and may result in severe cracking, component separation or "blowout." It reduces tire load capacity, allows excessive sidewall flexing and increases rolling resistance, resulting in heat and mechanical damage. Maintaining proper inflation pressure is the single most important thing you can do to ensure tire durability and maximum treadlife.

Overinflation increases stiffness, which may deteriorate ride and generate unwanted vibration. Overinflation also increases the chances of impact damage.

DON'T OVERLOAD YOUR VEHICLE.

Check your vehicle owner's manual to determine the load limits. Overloading your vehicle places stress on your tires and other critical vehicle components. Overloading a vehicle can cause poor handling, increased fuel consumption and may cause tire failure.

Never fit your vehicle with new tires that have less load capacity than shown on the vehicle tire placard and remember that optimum rim width is important for proper tire load distribution and function.

The maximum load capacity stamped on the sidewalls of P-Metric tires is reduced by 10 percent when used on a light truck, utility vehicle or trailer. Never fit P-Metric tires to light trucks that specify LT-type replacement tires.

DON'T SPIN YOUR TIRES EXCESSIVELY.

Avoid excessive tire spinning when your vehicle is stuck in snow, ice, mud or sand. The centrifugal forces generated by a free-spinning tire/wheel assembly may cause sudden tire explosion resulting in vehicle damage and/or serious personal injury to you or a bystander. Never exceed 35 mph (55 km/h) as indicated on your speedometer. Use a gentle backward and forward rocking motion to free your vehicle for continued driving. Never stand near or behind a tire spinning at high speed as, for example, while attempting to push a vehicle that is stuck or when an on-the-car spin balance machine is in use.

DO CHECK YOUR TIRES FOR WEAR.

Always remove tires from service when they reach two thirty-seconds of an inch (2/32") remaining tread depth. All new tires have tread wear indicators, which appear as smooth banks in the tread grooves when they wear to the two thirty-seconds of an inch (2/32") level. Many wet weather accidents result from skidding on bald or nearly bald tires. Excessively worn tires are also more susceptible to penetrations.

DO CHECK YOUR TIRES FOR DAMAGE.

Frequent inspection of your tires for signs of damage and their general condition is important for safety. If you have any questions, have your tire dealer inspect them. Impacts, penetrations, cracks, knots, bulges or air loss always require tire removal and expert inspection. Never perform a temporary repair or use an innertube as a substitute for a proper repair. Only qualified persons should repair tires.

PROPER TIRE REPAIR.

NOTE: Dunlop® does not warrant any inspection or repair process. The repair is entirely the responsibility of the repairer and should be made in accordance with established Rubber Manufacturers Association (RMA) procedures.

DON'T ATTEMPT TO MOUNT YOUR OWN TIRES.

Serious injury may result from explosion of tire/rim assembly due to improper mounting procedures. Follow tire manufacturer's instructions and match tire diameter to rim diameter. Mount light truck radials on rims approved for radial service. Do not apply bead sealer. This can inhibit bead seating. Lubricate beads and tire rim (including tube or flap) contact surfaces. Lock assembly on mounting machine or place in safety cage. **STAND BACK** and never exceed 40 psi to seat beads. Never use a volatile substance or a rubber "donut" (also known as a bead expander or "O-Ring") to aid bead seating. Only specially trained persons should mount tires.

DON'T MIX TIRES OF DIFFERENT SIZES AND TYPES ON THE SAME AXLE.

For optimum handling and control, Dunlop recommends fitment of four (4) tires of the same type and size unless otherwise specified by the vehicle manufacturer.

⚠ WARNING: Vehicle handling, traction, ride comfort and other performance parameters may be significantly affected by a change in tire size or type. Before replacing tires, always consult and follow the vehicle owner's manual because some vehicle manufacturers prohibit changing tire size. When selecting tires that are different from the Original Equipment size, make certain: (1) The tires have adequate load-carrying capacity based on the vehicle placard, (2) The tires have sufficient inflation pressure to carry the load and (3) There is proper clearance with no interference points between the tire and vehicle. The consumer must be aware to always drive safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow any of these warnings may result in loss of control of the vehicle, leading to an accident and serious injury or death.

FOLLOW THESE ADDITIONAL GUIDELINES:

Fit newest tires on rear axle. If radials and non-radials must be fitted to the same vehicle, fit radials on rear axle. Never mix radials and non-radials on the same axle. When fitting Snow tires or All-Season tires to performance vehicles, always fit in sets of four. It is not recommended to fit tires with different speed ratings. If tires with different speed ratings are installed on a vehicle, they should be installed with like pairs on the same axle. The speed capability of the vehicle will become limited to that of the lowest speed-rated tires. Also, it is recommended that the lower speed-rated tires be placed on the front axle regardless of which axle is driven to help prevent potential oversteer.

Use of lift kits with some vehicle/tire combinations can cause instability. When changing tire sizes, always consult Dealer for optimum rim width and carefully check vehicle/tire clearances.

RETREADED TIRES.

Retreaded passenger and light truck tires are not warranted by Dunlop for any reason. Dunlop speed ratings and U.S. Department of Transportation test compliance certifications are voided for retreaded tires.

DO MAINTAIN VEHICLE SUSPENSION, WHEEL ALIGNMENT AND BALANCE AND ROTATE YOUR TIRES.

Lack of rotation, worn suspension parts, underinflation/overinflation, wheel imbalance and misalignment can cause vibration or irregular tire wear. Rotate your tires according to your vehicle manufacturer's recommendations or at maximum intervals of 6,000 miles (10,000 kilometers).

FOR ADDITIONAL INFORMATION, SEE THE "CONSUMER TIRE GUIDE" PUBLISHED BY THE TIRE INDUSTRY SAFETY COUNCIL, P.O. BOX 1801, WASHINGTON, DC 20013-1801, OR WRITE TO GOODYEAR/DUNLOP CONSUMER RELATIONS, DEPT. 728, 1144 EAST MARKET STREET, AKRON, OH. 44316-0001. YOU MAY ALSO CALL DUNLOP AT 1-800-321-2136.

Dunlop brand tires are serviced by The Goodyear Tire & Rubber Company and Goodyear Canada Inc. through authorized Dunlop outlets.

You must go to an authorized Dunlop outlet for replacement tires and all warranty service.

CONVENIENCE (TEMPORARY) SPARE.

Convenience (Temporary) Spares are designed to take up a minimum of storage space and, at the same time, fulfill the function of a spare tire when needed. The spare is kept in its storage space, fully inflated at 60 psi. To be sure it is always ready for use, the air pressure should be checked on a regular basis.



The Convenience (Temporary) Spare can be used in combination with the original tires on your vehicle, but should never be used on a vehicle with which it is not compatible, nor should more than one such tire be placed on any vehicle at any given time. To conserve tire treadlife, it is meant to be returned to the spare tire storage area as soon as it is convenient to have the standard tire repaired or replaced.

The wheels used with the Convenience (Temporary) Spare are specifically designed for use with high-pressure spares and should never be used with any other type tire.

HOW TO READ A TIRE D.O.T. SERIAL NUMBER.

D.O.T. stands for Department of Transportation and is on the lower sidewall of each tire to show that the tire meets or exceeds the Department of Transportation safety standards.

Understanding Tire D.O.T. Numbers

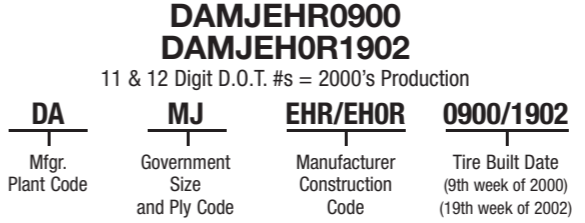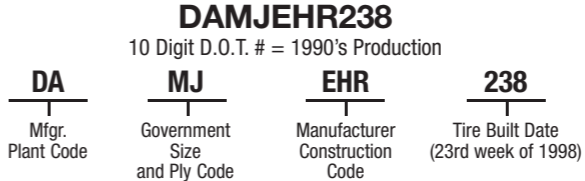

TIRE SERVICE LIFE.

Tires are designed and built to provide many thousands of miles of excellent service. For maximum benefit, tires must be maintained properly to avoid tire damage that may result in removal from service before the tread is worn down to minimum depth.

It is not practical to accurately predict the service life of any specific tire in chronological time since service conditions vary widely. The serviceability of a tire over time is a function of the storage and service conditions (inflation pressure, load, speed, road hazard injury, etc.) to which a tire is subjected. Consumers should not rely solely on the appearance of the tire, but should be aware of any change in dynamic performance such as increased air loss, noise or vibration, which could be a sign to remove the tire. Therefore, it is essential to have tires, including spares, inspected regularly (at least monthly) for proper inflation pressure, damage and tread wear.

FOR SERVICE ASSISTANCE OR INFORMATION:

- **FIRST CONTACT THE NEAREST DUNLOP RETAILER.**
- **IF ADDITIONAL ASSISTANCE IS REQUIRED:**

IN THE UNITED STATES:

Call (800) 321-2136, e-mail: goodyear_cr@goodyear.com, or write: Goodyear/Dunlop Consumer Relations, Dept. 728 1144 East Market Street, Akron, OH 44316-0001

IN CANADA:

Call (800) 387-3288, or write: Goodyear/Dunlop Consumer Relations Department 450 Kipling Avenue Toronto, Ontario M8Z 5E1



LIMITED WARRANTY AND TIRE CARE AND MAINTENANCE GUIDE

HIGHWAY AUTO TIRES LIGHT TRUCK TIRES



DUNLOP® LIMITED WARRANTY

WHO IS ELIGIBLE?

You are eligible for the benefits of this Limited Warranty if:

- You are the owner or authorized agent of the owner of new Dunlop highway auto or light truck tires, and
- Your tires bear Department of Transportation prescribed tire identification numbers, and
- Your tires have been used only on the vehicle on which they were originally installed according to the vehicle manufacturer or Dunlop recommendations, and
- Your tires were purchased on or after October 1, 2003.

Light truck tires are defined as all tires identified with the “LT” designation in the sidewall stamping plus the 8-19.5 and 8R19.5 sizes which do not carry the “LT” designation.

WHAT IS COVERED AND FOR HOW LONG? FREE TIRE REPLACEMENT.

Dunlop D65® T Touring™: Any Dunlop D65 T Touring tire that is removed from service due to a covered warranty condition within six (6) years from the date of purchase will be replaced with a comparable new Dunlop tire at no charge, including mounting and balancing. (Without proof of purchase, the date of manufacture will be used to determine age.)

Dunlop SP® 40 A/S™: Any Dunlop SP 40 A/S that is removed from service due to a covered warranty condition during the first 50 percent of usable tread wear or within six (6) years from date of purchase, whichever occurs first, will be replaced with a comparable new Dunlop tire at no charge, including mounting and balancing. (Without proof of purchase, the date of manufacture will be used to determine age.)

All Other Dunlop Auto and Light Truck Tires: Tires that are removed from service due to a covered warranty condition during the first 2/32" tread wear or 12 months from date of purchase, whichever occurs first, will be replaced with a comparable new Dunlop tire at no charge. Mounting and balancing are included. (Without proof of purchase the date of manufacture will be used to determine age.)

PRO-RATED ADJUSTMENT.

A tire not eligible for no-charge replacement that is removed from service due to a covered warranty condition will be replaced with a comparable new Dunlop tire on a pro-rated basis.

HOW WILL PRO-RATED CHARGES BE CALCULATED?

Replacement price will be calculated by multiplying the tire’s advertised retailer selling price at the time of adjustment by the percentage of usable original tread that has been worn off. You pay for mounting, balancing and applicable taxes.

Example: If your disabled tire had an original 8/32" of usable tread wear and is worn to 4/32" usable tread remaining, you have used 50 percent and, therefore, must pay 50 percent of the current advertised selling price of the replacement tire. If the price of the new replacement tire is \$80, the cost to you would be \$40, plus any additional charges such as mounting, balancing and applicable taxes.

WHAT IS A COMPARABLE TIRE?

A “comparable” new Dunlop tire may either be the same line of tire or, in the event that the tire is not available, a tire of the same basic construction and quality with a different sidewall or tread configuration. If a higher priced tire is accepted as replacement, the difference in price will be at an additional charge to you.

Any replacement tire provided pursuant to this warranty will be covered by the Dunlop warranty in effect at the time of replacement.

DUNLOP TREADLIFE LIMITED WARRANTY

In addition to the provisions of the limited warranty for covered warranty conditions, any new Dunlop highway auto or light truck tire listed below is warranted against tread wear-out based on the following table:

Tire	U.S. Miles	Canada Kilometers
Signature™ T-Rated	75,000	120,000
Signature H-Rated	60,000	95,000
Signature V-Rated	60,000	95,000
D65 T Touring	80,000	130,000
SP® 60™	65,000	105,000
SP 40 A/S	65,000	105,000
SP Sport A2® Plus™	50,000	80,000
G/T Qualifier®	50,000	80,000
Grandtrek® AT20™	60,000	95,000
Radial Rover A/T™	60,000	95,000
Sport Rover GTX™	50,000	80,000

HOW WILL TREADLIFE LIMITED WARRANTY CHARGES BE CALCULATED?

If the tread wears evenly down to the tread wear indicators (worn to 2/32") before delivering the warranted mileage,the tire will be replaced on a pro-rated basis, provided the original invoice is presented showing the vehicle mileage when the tires were originally installed.

Example: If your tire had a treadlife warranty of 40,000 miles (65,000 km) and delivered 20,000 miles (32,500 km) prior to wear out (worn to 2/32"), the tire will be replaced for 50 percent of the current advertised selling price of the comparable tire at the time of adjustment. If the price of the new comparable tire is \$80, the cost to you would be \$40, plus any additional charges such as mounting, balancing and any applicable taxes.

The treadlife limited warranty applies only if you are the original purchaser and the tires have been used only on the vehicle on which they were originally installed according to The Goodyear Tire & Rubber Company or the vehicle manufacturer’s recommendations.

However, the treadlife limited warranty does not apply to:

- Tires used in commercial applications, including, but not limited to, police, taxi service, national account, government and contract sales.
- Tires supplied as Original Equipment are not eligible for the treadlife limited warranty.

- Tires that are installed on any vehicle other than the vehicle on which they were originally installed.
- Tires that after leaving the producing factory have had the tread pattern altered in any manner: such as, but not limited to, siping, carving, shaving, or by having any material applied to the tread surface.
- You must retain your original tire purchase invoice (see B. under Owner’s Obligations) for treadlife limited warranty consideration.

OWNER’S OBLIGATIONS.

- A. You must rotate your tires in accordance with the prescribed rotation patterns as recommended by either the vehicle manufacturer or The Goodyear Tire & Rubber Company.
- B. When making a claim under the treadlife limited warranty, you must present your original tire purchase invoice which shows the tire description, mileage and the date the tire(s) were installed.
- C. You must present the tire to be adjusted to a Dunlop Tires Retailer. Tires replaced as an adjustment become the property of The Goodyear Tire & Rubber Company or Goodyear Canada Inc.
- D. You must pay for any additional service you order at the time of adjustment relating to any unique applications requiring mounting, demounting and balancing.
- E. When making a claim for ride disturbance, you must present your original tire purchase invoice, which shows the tire description and the date the tire(s) were purchased.
- F. No claim will be recognized unless submitted on an approved claim form (supplied by a Dunlop Tires Retailer) completely filled out and where you the owner or your authorized agent presented the tire for adjustment.

ADDITIONAL PROVISIONS.

A tire has delivered its full original treadlife and the coverage of this warranty ends when the tread wear indicators become visible (worn to 2/32"), or six (6) years from the date of original tire manufacture or new tire purchase date. (Without proof of purchase, the date of manufacture will be used to determine age.)

LIMITATIONS.

This limited warranty is applicable only in the United States and Canada.

WHAT IS NOT COVERED BY THIS WARRANTY?

This limited warranty does not cover the following:

- Tires submitted for ride disturbance that are worn beyond the first 2/32" tread depth or beyond six (6) months from the date of purchase, whichever occurs first, or tires submitted for ride disturbance due to damaged wheels or any vehicle condition. Proof of purchase is required (see E. under Owner’s Obligations).
- The Goodyear Tire & Rubber Company does not warrant or give credit in any adjustment transaction for any kind of material added to a tire (e.g., tire fillers, sealants, balancing substances) after the tire leaves a factory producing Dunlop tires, nor will it adjust any tire that has failed as a result of adding such material.
- Irregular wear or damage due to mechanical condition of the vehicle, improper inflation, overloading, high-speed spin-up, misapplication, misuse, negligence, racing, use of tire chains, improper mounting or demounting, improper repair, wreck, collision or fire.
- Road hazards (includes, but not limited to, punctures, cuts, snags, impact breaks, etc.).

- Any tire that, after leaving a factory producing Dunlop tires, has been intentionally altered to change its appearance (e.g., white inlay on a black tire or regrooved).
- Tires with weather-cracking that were purchased more than four (4) years prior to presentation for adjustment or, if purchase date cannot be verified, manufactured more than four (4) years prior to presentation for adjustment.
- **Loss of time, inconvenience, loss of vehicle use, incidental or consequential damages.**

WHAT ARE YOUR LEGAL RIGHTS?

Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

No Representative or Dealer has authority to make any representation, promise or agreement on behalf of The Goodyear Tire & Rubber Company, except as stated herein.

Any tire, no matter how well constructed, may fail in service or otherwise become unserviceable due to conditions beyond the control of the manufacturer. Under no circumstances is this warranty a representation that a tire failure cannot occur.

This warranty gives you specific legal rights, and you may also have other rights that vary from state to state and in Canada from province to province.

HOW DO YOU OBTAIN AN ADJUSTMENT?

- A. You must present the tire to be adjusted to an authorized Dunlop service facility. Tires replaced on an adjustment basis become the property of The Goodyear Tire & Rubber Company or Goodyear Canada Inc.
- B. You must pay for taxes and any additional services you order at the time of adjustment.
- C. You must submit your claim on The Goodyear Tire & Rubber Company claim form supplied by an authorized Dunlop service facility. The form must be filled out completely, where you the owner or your authorized agent presented the tire for adjustment.

⚠️ WARNING: Property damage, serious injury or death may result from:

- **TIRE FAILURE DUE TO UNDERINFLATION/OVERLOADING:** Follow the vehicle owner’s manual or tire placard in vehicle.
- **EXPLOSION OF TIRE/RIM ASSEMBLY DUE TO IMPROPER MOUNTING:** Only specially trained persons should mount tires.
- **FAILURE TO MOUNT RADIAL TIRES ON APPROVED RIMS.**
- **FAILURE TO DEFLATE SINGLE OR DUAL ASSEMBLIES COMPLETELY BEFORE DEMOUNTING.**
- **TIRE SPINNING ON SLIPPERY SURFACES SUCH AS SNOW, MUD, ICE, ETC. DO NOT SPIN TIRES IN EXCESS OF 35 MPH (55 KPH), AS INDICATED ON THE SPEEDOMETER. PERSONAL INJURY AND SEVERE DAMAGE MAY RESULT FROM EXCESSIVE WHEEL SPINNING, INCLUDING TIRE DISINTEGRATION OR AXLE FAILURE.**

SIX MONTH – 6,000 MILE / 10,000 KILOMETER ROTATION RECORD		
Odometer Reading	Rotated by	Date
Odometer Reading	Rotated by	Date
Odometer Reading	Rotated by	Date
Odometer Reading	Rotated by	Date
Odometer Reading	Rotated by	Date
Odometer Reading	Rotated by	Date
Odometer Reading	Rotated by	Date
Odometer Reading	Rotated by	Date
Odometer Reading	Rotated by	Date

DUNLOP TIRE CARE AND MAINTENANCE GUIDE

The easiest way to help ensure satisfactory mileage and performance from your Dunlop tires is to give them a simple but frequent inspection for proper inflation, even tread wear and the presence of any damage.

MAINTAIN PROPER INFLATION PRESSURE IN YOUR TIRES.

Proper inflation pressure is necessary for optimum tire performance, safety and fuel economy. To maintain proper inflation pressure, frequently check tires (when they are cool) **with an accurate tire pressure gauge*** since it is difficult to tell just by looking at radial tires whether they are underinflated.

Furthermore, when operating a vehicle equipped with radial tires, it is difficult to notice when a tire has gone flat or nearly flat since the “feel” of the vehicle does not change significantly.

***Evidence of air loss or repeated underinflation always requires expert inspection to determine the source of leakage and tire removal to determine repairability.** To avoid injury, **NEVER** attempt to re-inflate a tire that has been run severely underinflated.

Progressive air loss may result from punctures, cuts, curbing, impacts or partial bead unseating. Some fitment causes for air loss are (1) incomplete bead seating, (2) bead tearing caused by a machine tool due to insufficient lubrication or improper adjustment, and (3) leaking valve core or rubber valve components. These should be replaced when problems are detected and whenever tires are replaced.